



Roof waterproofing
that truly lasts!



Neoproof® PU W
Water-based aliphatic
polyurethane system



Neoproof® Polyurea R
Innovative cold-applied
polyurea system



Neorroof®
Hybrid elastomeric roof
waterproofing system

Roof Waterproofing Systems by NEOTEX

Certified Service Life of 25 Years

Durable roof waterproofing is a critical requirement for modern building structures. Choosing **certified systems** with documented long-term performance ensures the functionality and protection of the building envelope, extending the overall lifespan of the construction.

NEOTEX offers multiple roof waterproofing systems with **European Technical Assessment (ETA)**, classified in the highest category **W3**, with an estimated **service life of 25 years**, according to the European Assessment Document **EAD 030350-00-0402 (Liquid Applied Roof Waterproofing Kits)**.

Neoproof® Polyurea R

Cold-applied elastomeric polyurea waterproofing coating, for durable long-lasting surface protection




Category **W3**, with a **service life of 25 years** (ETA 24/1247)
 • under the most **severe** and **demanding** conditions
 • even as an **unreinforced system**, without the use of any **additional** protective topcoat

System **Neoproof® Polyurea R** (ETA 24/1247)

Systems	S1: Without reinforcement S2: With Neotextile® NP
Minimum thickness	S1: 1mm / S2: 1,2mm
Consumption	S1: ≥1,5kg/m² / S2: ≥2,3kg/m²
Classification acc. to EAD 030350-00-0402	
Service life	W3 (25 years)
Climatic zone	S (Severe)
User load	• P2 (moderate) up to P3 (normal) • S2: P2 (moderate) / S1: P1 (low)
Roof slope	S1-S4 (slopes <5% up to >30%)
Lowest surface temperature	TL4 (-30°C)
Maximum surface temperature	TH4 (+90°C)

Neoproof® PU W

Water-based aliphatic polyurethane waterproofing coating for exposed roofs

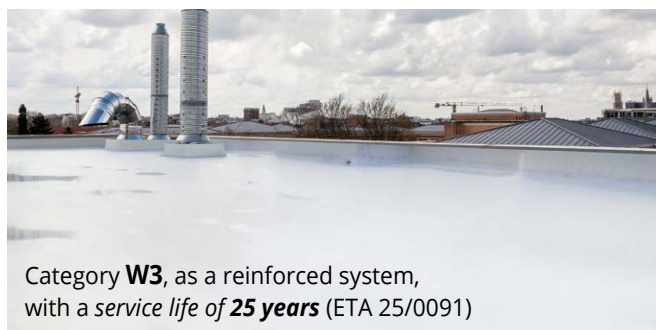


Category **W3**, as a reinforced system, with a **service life of 25 years** (ETA 25/0091)

System **Neoproof® PU W** (ETA 25/0091)

System	With Neotextile® 50gr
Minimum thickness	1,4mm
Consumption	≥2,5kg/m²
Classification acc. to EAD 030350-00-0402	
Service life	W3 (25 years)
Climatic zone	S (Severe)
User load	P2 (moderate) up to P3 (normal)
Concrete – Steel	
Roof slope	S1-S4 (<5% up to >30%)
Lowest surface temperature	TL3 (-20°C)
Highest surface temperature	TH4 (+90°C)

Neoroo®

Hybrid (PU-acrylic) elastomeric waterproofing coating for roofs, with superior cool roofing properties

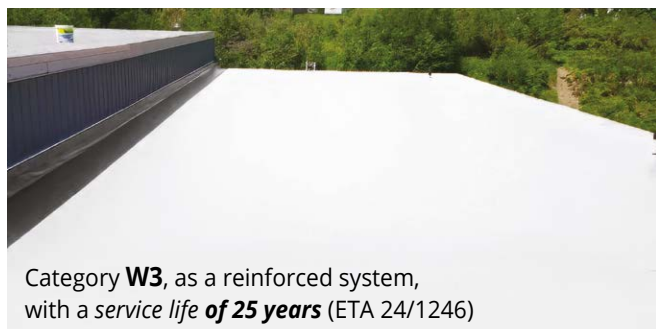

Category **W3**, as a reinforced system, with a **service life of 25 years** (ETA 24/1246)

System **Neoroo®** (ETA 24/1246)

System	With Neotextile® 50gr
Minimum thickness	1,2mm
Consumption	≥2,5kg/m²
Classification acc. to EAD 030350-00-0402	
Service life	W3 (25 years)
Climatic zone	S (Severe)
User load	P1 (low)
Concrete – Steel	
Roof slope	S1-S4 (<5% up to >30%)
Lowest surface temperature	TL4 (-30°C)
Highest surface temperature	TH4 (+90°C)

25 years,
certified

NEOTEX develops specialized waterproofing systems, designed to withstand extreme environmental and mechanical challenges. With certified quality and cutting-edge technology, it offers solutions that **truly last over time**, even under the most severe and demanding conditions.